


## COPPER BONDED STEEL GROUND RODS

- All Blackburn Ground Rods have a heavy uniform covering of electrolytic copper. The copper is metallurgically bonded to a rigid steel core.
- Copper ions are forced electrically to join with the steel core, thus establishing a corrosion resistant bond between the copper and the steel.
- All Blackburn rods are put through a special drawing operation which work hardens the copper to provide a scar resistant surface.

### Price Schedule 8A

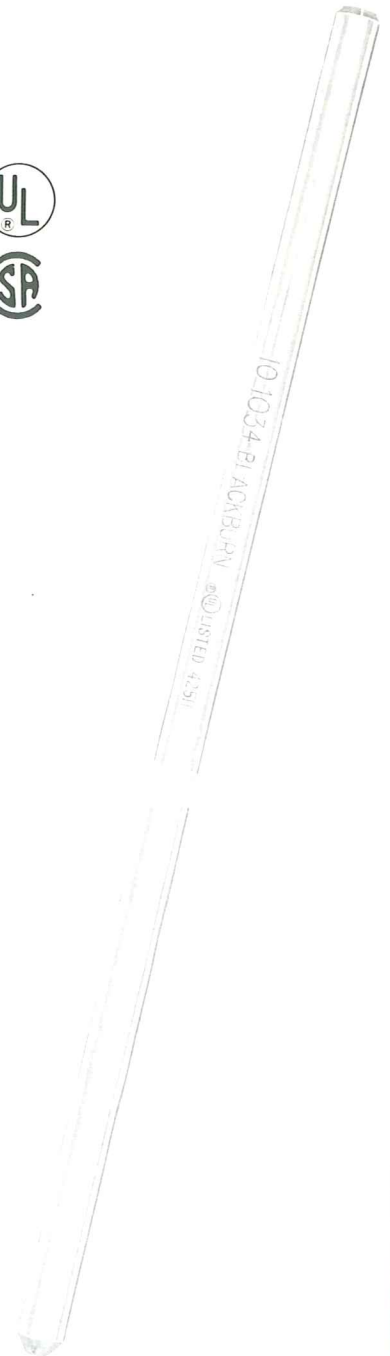

CATALOG NUMBER	ROD SIZE (NOMINAL DIAMETER) x LENGTH	STD. BDL.	WT. PER 100 (lbs.)	(kgs.)
3755	3/8" x 5'	10	165	75
3765	3/8" x 6'	10	200	90
3758	3/8" x 8'	10	265	120
5005	1/2" x 5'	5	305	138
5006	1/2" x 6'	5	370	168
5008	1/2" x 8'	5	545	247
5010	1/2" x 10'	5	611	277
5012	1/2" x 12'	5	715	340
5015	1/2" x 15'	5	915	415
5008L*	1/2" * x 8'	5	708	321
5010L*	1/2" * x 10'	5	794	360
5012L*	1/2" * x 12'	5	929	442
5015L*	1/2" * x 15'	5	1190	539
6255	5/8" x 5'	5	424	193
6256	5/8" x 6'	5	508	230
6258*	5/8" x 8'	5	678	308
6259*	5/8" x 9'	5	763	346
6260*	5/8" x 10'	5	847	384
6262*	5/8" x 12'	5	1017	461
6265*	5/8" x 15'	5	1272	577
6266*	5/8" x 16'	5	1356	615
7505	3/4" x 5'	3	620	281
7506	3/4" x 6'	3	744	335
7508*	3/4" x 8'	3	992	450
7510*	3/4" x 10'	3	1240	562
7512*	3/4" x 12'	3	1488	675
7115*	3/4" x 15'	3	1860	844
7516*	3/4" x 16'	3	1984	900
7520*	3/4" x 20'	3	2480	1125
1010*	1" x 10"	2	2248	1020
1020*	1" x 20"	1	4496	2039

\*Ground rods are U.L. Listed (425H). Underwriters Laboratories, Inc. does not list any regular rods shorter than 8' or less than 1/2" \*. CSA lists rods 1/2" \* and larger, 10' and longer.

GROUNDING PRODUCTS

